




Voice Control



SPECIFICATIONS:

- YG-SMPL12+BLRGB
- 11.5inch(295mm)
- Front light:20W
- Front light:2700-5000K
- Back light:5W
- Back light:RGB
- 120Vac
- App or Voice dimming 1%-100%
- CRI 80+
- Works with Alexa, Echo, Google Home
- 50000hours
- ETL/cETL/FCC listed

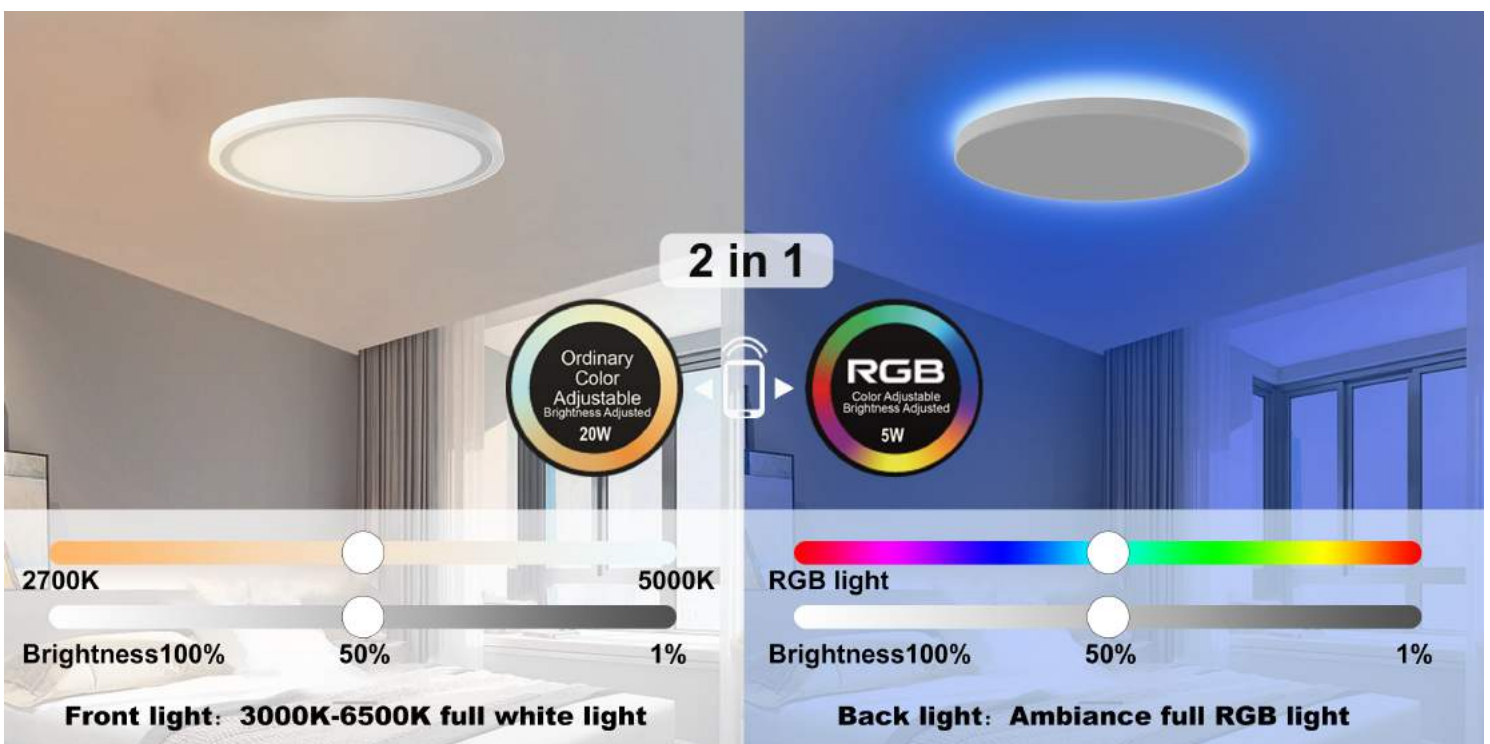

LED Slim Flush Mount with back light

STRUCTURE:



FUNCTION (Back Light)



Support to choose 16 millions different colorful ambient back light

Choose from 16 Million color shades, also can adjust the color brightness to any level from 1-100%, there are different scene mode for your choice.



Play game with friends in a exciting atmosphere

Enjoy a movie time with children

Create a romantic world at home

Enjoy relax time with warm atmosphere



Group Control via Smart Life APP How to control multiple light at the same time?

1. Open the Smart life app
2. Click on the "Home" page
3. Choose one of the light you want to control
4. Click the "..." option in the top right corner
5. Click "Create Group"
6. Choose all the light you want to control




APP Remote Control

Control the smart light bulb anytime anywhere via eHomeLife app, no distance limitation.



Hands-Free Voice Control

Works with the Amazon Alexa , Google Home , just make a voice commands to control the light, make your hands free.

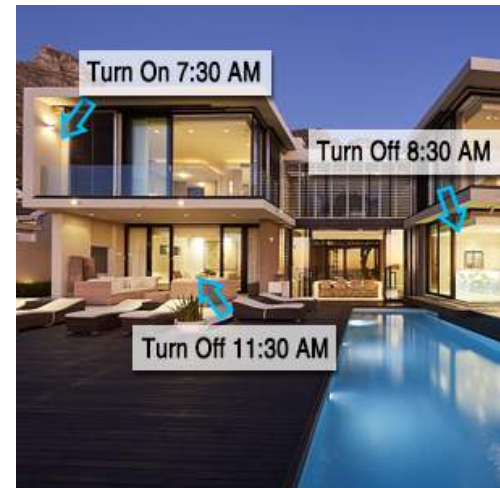


Smart Timer Setting

Schedule the light to automatically switch on and off when away. Such as schedule the Living Room Light On at 7:00 PM when off work, never back to a dark home.




Turn off the power at fuse or circuit box.

1. Attach the two mounting screws (AA) to the holes on outlet box, thread them in part way: 2 to 3 turns only.

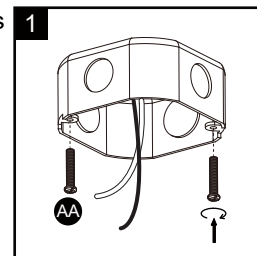


2. Slide the Ceiling pan (A) until it separate from the plastic shade (B). Pull out the Male connector from the Female connector.

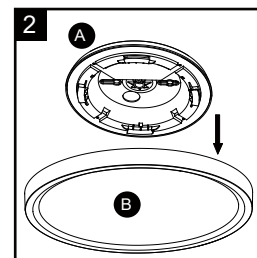


3. Pull out the source wires from the outlet box, thread them through the big hole of the ceiling pan (A).

Attach the ceiling pan (A) to the outlet box by inserting two mounting screw (AA) heads into the key holes, then slide the ceiling pan until it is locked in place.

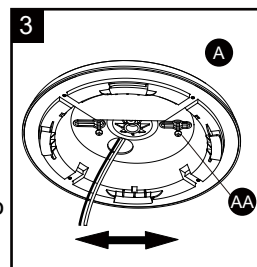

4. Connect the black wire to black (power) wire, white wire to white (neutral) wire with supplied wire connectors (BB). Tuck all wires into outlet box. Then secure the mounting screws tightly with screwdriver (not included).

Finally connect the Female Connector to the Male Connector.

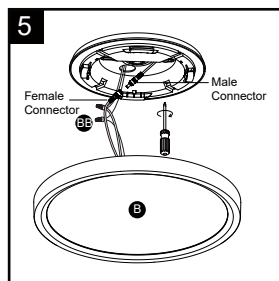

5. Attach the main body (B) to the ceiling pan (A) by aligning studs and slots, then turn it clockwise until it is locked in place.

Turn on the power at fuse or circuit box.

